

# JUST SAUNA: THE HIGH-END SAUNA CONTROL.

110° by sentiotec

## Sauna control just sauna fin:

- 10,5 kW white Item-no.: JUST-105W-FI
- 10,5 kW black Item-no.: JUST-105D-FI

## Sauna control just sauna combi:

- 10,5 kW white Item-No.: JUST-105W-CO
- 10,5 kW black Item-No.: JUST-105D-CO



## Innovative technology just sauna fin:

- Ultra-slim Design
- High-quality long life components
- One or dual sensor system
- Temperature display
- Temperature setting ranges  
sauna mode: 55 to 110 ° C
- Contact rating/heater: 3 x 3,5 kW
- Contact rating/additional output\*:
  - dimmable: 500 W
  - switchable: 3,5 kW
- Optional dimming or switching of a cabin light (to 100 W), also for LEDs suitable
- Optional dimming or switching of a fan (to 100 W)
- Remote start
- Status output
- Heating time restriction 6 hrs
- For private saunas

## just sauna combi (additional to fin):

- One or dual sensor system
- Also suitable for leads
- At dual sensor system bench sensor or humidity temperature sensor are usable)
- Temperature- and humidity display
- Temperature setting ranges  
sauna mode: 55 to 110 ° C  
combi mode: 20 to 75 ° C
- Humidity setting range: 25 to 80 %
- Contact rating/evaporator: 3,5 kW
- Post-drying programme

\*The additional output has no excess temperature fuse. For this reason only intrinsically safe devices should be operated on the additional output.

If infrared heaters are connected to the additional output, these must have an excess temperature fuse. We recommend using the following infrared heaters:

- DIR-350-R, WIR-350-R, DIR-500-R, WIR-500-R, DIR-750-R, WIR-750-R, DIR-1300-R, WIR-1300-R
- ECO-350-R, ECO-350-G, ECO-500-R, ECO-500-G, ECO-750-R

If one of the following infrared heat plates is connected to the additional output, the foil sensor P-ISX-FF must be used:

- R-WP-100, IR-WP-175, IR-WP-390, IR-WP-510
- IR-WPHL-100, IR-WPHL-175, IR-WPHL-390, IR-WPHL-510

# JUST SAUNA: THE HIGH-END SAUNA CONTROL.

110° by sentiotec

## Scope of delivery just sauna fin:

- Operating unit
- Power unit
- Heater sensor with integrated excess temperature fuse
- Bench sensor
- Sensor wires
- Installation material

## Accessories just sauna fin:

- Foil sensor (Item-No. P-ISF-FF)
- Power booster (Item-No. O-S2-18 / O-S2-30)
- Safety shut-off (Item-No. HT-SWL). With deactivated remote start function (factory setting) is no safety shutdown necessary.
- Wooden sensor ring for F1/F2/FTS2 sensor dark (Item-No. O-F-DD) light (Item-No. O-F-DH)
- Flat ribbon (3 m) for the connection of power unit and operating unit

## Dimensions just sauna fin:

- Installation cut-out: 213 x 82 mm
- Power unit: 307 x 175 x 52 mm
- Operating unit (with installation frame): 222 x 94 x 38 mm
- Operating unit (without installation frame): 222 x 94 x 31 mm
- Glass panel of the operating unit: 3,5 mm



## Scope of delivery just sauna combi:


- Operating unit
- Power unit
- Heater sensor with integrated excess temperature fuse
- Sensor wires
- Installation material
- Wire jumper for bridging terminals V1 and Wm for combi heaters without automatic low-water shut-off

## Accessories just sauna combi (addit. to fin):

- Bench sensor Item-No. O-F2)
- Humidity temperature sensor (Item-No. O-FTS2)

## Dimensions just sauna combi:

- Installation cut-out: 213 x 82 mm
- Power unit: 307 x 175 x 52 mm
- Operating unit (with installation frame): 222 x 94 x 38 mm
- Operating unit (without installation frame): 222 x 94 x 31 mm
- Glass panel of the operating unit: 3,5 mm

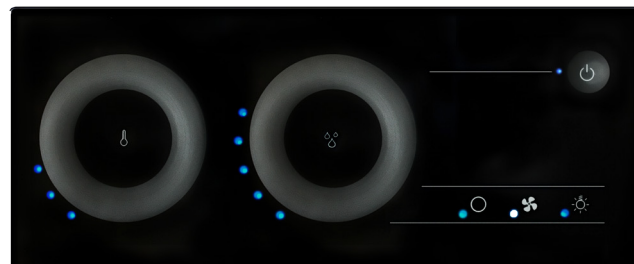

**WE DO IT FIRST.**  
ABATEC GROUP AG

sentiotec GmbH  
world of wellness  
Oberregauer Straße 48  
4844 Regau, Austria

T +43 (0) 7672/277 20-800  
F +43 (0) 7672/277 20-801  
E info@sentiotec.com  
www.sentiotec.com